

Dual Monitor Hood Installation Instructions

In The Package:

- Two monitor hood halves
- Two knob and screw sets
- Four silicone support buttons (2 extra)
- Two rolled foam tapes (if needed)

ATTENTION!

Photodon is here to make sure you are satisfied with our product. If you have questions or concerns, please check out the **Installation Video:**

<https://youtu.be/uyoOp5MzhnE>

or contact us at:

sales@photodon.com | 847-377-1185

Overview

Installation of this hood requires two people; one person to hold it in place while the other person adjusts and sets the elastic cord.

Installation consists of assembling the hood by joining the two halves, securing the hood with an elastic cord, applying the support buttons; and making final adjustments.

Assemble the Hood

On a large table or floor area, align the back holes and insert one of the screws from the bottom side. Lightly tighten the knob on top.


Insert the screw from the bottom side of the slot and lightly tighten the knob at the approximate angle of your monitors.

Installing The Hood:

A second person is needed for this step to help hold the hood until the cord is tightened.


Pull the top and bottom cord up across the top and loop over the back knob to keep them from slipping off.

Place the hood on the monitors.

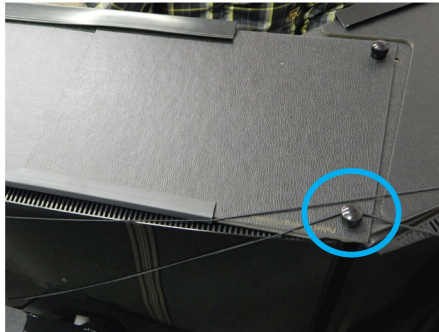

Loop the bottom cord around the bottom corners as shown the second image. Adjust the angle of the hood and hand tighten the 2 knobs on top.

Tighten the mount by adjusting the slack in the elastic cord from both of the cord locks. You may need to slide the cord from the backside to get the tension that is best for your monitor. The cord should be fairly tight. It is possible that you may need to change the holes that the cord is using to improve the mount for your monitor.

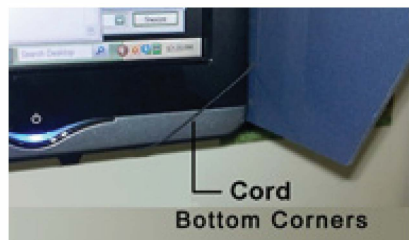

The Look: You can adjust the hood forward or backward and tilt it slightly up or down to give it the look you want. Typically the top of the hood is level with the monitor.

Apply Support Buttons:

Make sure the hood is sitting properly on your monitor; look at it from all sides. If the elastic cord is not keeping the hood exactly where you want it, you can use the black support buttons to help hold it as needed. Remove the liner of one of the black support buttons and place the support button on the top inside corner of the hood tight to the monitor. Press firmly to adhere. Repeat for the opposite side as needed.



Secure the Cord

Once satisfied with the mount, tie off the extra cord.

Attach the light-blocking foam strip (optional)

This may be done after installing the hood if necessary. Cut the foam strip to length and apply along the top edge of your monitor. Peel the paper to expose the adhesive. This prevents light from seeping in where a gap may be present.

Note: On certain flat panel screens the weight of the hood may cause the monitor to drift down. In this case, a strip of material (foam or cardboard) cut to the proper size and placed between the monitor and the support bracket (stand) in the back of the monitor will keep this from happening.



Hood Care

The outside and inside surface can be cleaned with glass cleaner or light solution of dishsoap and water. The outside can be polished with automotive vinyl cleaner as needed. Be careful not to submerge or allow the edges to get wet.

Congratulations!

Enjoy many years of reduced eye strain and improved screen viewing.

PhotoDon
Improving Screen Images

Thank you for your purchase!