


Indoor / Outdoor Monitor Hood Installation

Indoor / Outdoor Hoods come in three pieces; a top and two legs. The image below is an overhead view with the pieces laid flat. There are Velcro strips on the sections marked with “A” and “B” to assemble the hood, as well as Velcro strips on the gray section of the flaps to attach the hood to the monitor or TV.



1. To assemble the hood, attach the Velcro on the underside of the A and B sections of the legs to the matching section on the Top piece. Be sure to leave the hinges for the legs just past the edge of the top piece to allow the legs to fold down properly.

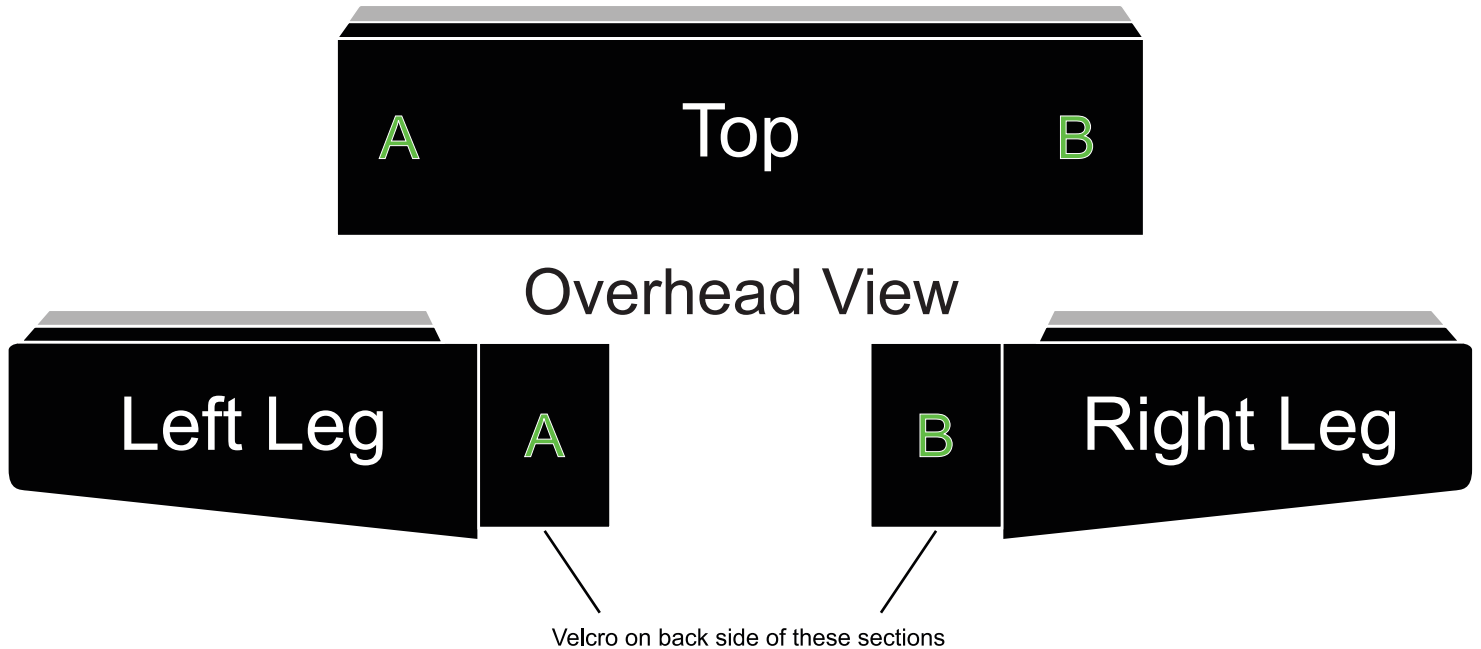

2. Hold the assembled hood up to the monitor/TV to verify the fit. A second person may be needed for a large device. If necessary, you can adjust the width slightly by detaching the legs from the Top piece and reattaching them at a different point along the Top piece.

3. When satisfied with the fit, expose the adhesive backing on the Velcro strips located on the flaps (the gray sections in the images). With the hood held in place, carefully press the flaps down to seal them to the back of the monitor/TV. After these have been set, the hood can be removed and reattached as needed.