

# Photodon Indoor-Outdoor Shade Monitor Hood

## Installation Instructions

### I. CONTENTS:

- **One** Indoor-Outdoor Shade Monitor Hood
- **One** silky cloth
- **One** Zeiss wipe
- **One** piece of rolled foam tape

#### A. Additional Contents for Adhesive Dual-Lock Installation Hoods

- 6" strips of adhesive-backed low-profile dual-lock attachments

#### B. Additional Contents for Adhesive Installation Hoods (for tablets)

- Pre-installed elastic cord
- 2 pre-installed cord locks
- 3 adhesive-backed L brackets

## II. ADHESIVE DUAL-LOCK INSTALLATION:

(Please see Section III below for Non-Adhesive Installation for Tablets instructions.)

#### A. **Before you start**

1. Remove and inspect the materials included in your package.
2. Verify that you have received the proper sized hood.


#### B. **Placement**

**Note:** For Indoor-Outdoor Shade Monitor Hoods longer than 27", it is recommended that 2 people perform the installation.

1. Place the hood on the device so that the flaps touch the back of

the device and the legs hang straight down the sides or tilt inward slightly.

- If at this point the hood does not seem to fit, please verify the measurements, and contact us.
2. Look at the back of the device and lift the flaps to determine where the best place to attach the dual-lock strips will be. Mark where the strips should be attached with scotch / masking tape.

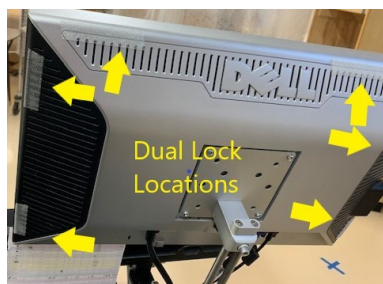

3. Remove the hood from the device and attach the adhesive-backed dual-lock strips to the back of the device near the edge where the device will touch the hood flap.
4. Place the hood back into position on the device to approximate the locations of the dual-lock strips that are to be installed on the hood.
5. Use the Zeiss wipe to clean the areas that the dual locks will be installed on.
6. Using a pencil or marker, flip up the flap and mark the position on the flap where the dual-lock strips need to be installed. Remove the hood and install the dual-lock strips.  
**Note:** Perform this procedure for the rest of the dual-lock strip pairs.

#### C. **Installation**

1. Using both hands – one to press on the hood and one to hold the monitor from the inside the hood – press firmly to initially connect the dual-lock.
2. Firmly press while sliding your finger to connect the dual lock fully through the length of the dual lock.
3. Repeat on the remaining dual lock positions.

#### D. **Removal**

1. Use caution when separating the dual lock strips so that one side stays on the hood and one side on the device – the adhesive side of the dual strip is not meant to be reusable.

## III. NON-ADHESIVE INSTALLATION FOR TABLETS:

#### A. **Position the Hood**

1. Carefully unfold the Indoor-Outdoor Shade Monitor Hood for your tablet; the cord may have to be fed through its holes to unfold.
2. With the flaps down, place your device between the legs to check for fit.
  - If at this point the hood does not seem to fit, please verify the measurements and contact us.

#### B. **Cord Adjustment**

1. With the device inside the hood, use your thumbs to hold the device in place and rotate it so the back is facing you.
2. Starting at the top, feed the cord through the holes so that the flaps

are pulled in towards the device. Tighten the cord and hold it in place using the cord lock.




3. Do the same to the other side, holding the cord in place with the cord lock.
4. Lay the hood back down and check that the legs are held tightly against the device edges.
5. Tighten if necessary.

**Note:** Extra cord may be cut with scissors; however, if there is a desire to fold the hood flat upon removal from the device, it is recommended not to cut off the extra cord.

#### C. **L-Bracket Placement**

1. Using the Zeiss wipe, clean the areas on the hood where the L-brackets will be placed.
2. Expose the adhesive for the L-Bracket by pulling off the red liner – ensure the adhesive remains on the L-bracket.

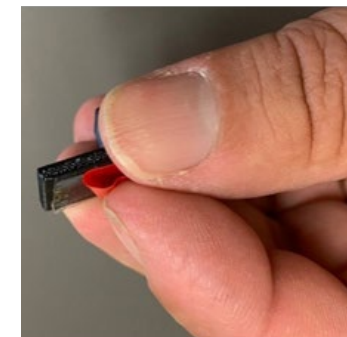

- Place 1 L-bracket near the hole in the flap at the bottom of the device on each side to help prevent the device from sliding downward.




- Place the third L bracket at the top of the device, on the hood- at or near the center without blocking the camera hole if there is one.

- Cut a small piece of tape and remove the white liner to expose the adhesive.



- Press the tape onto the hood to block the light.

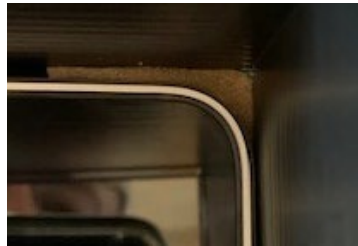

- Reinstall the device.

#### **IV. LIGHT BLOCKING FOAM**

##### **TAPE:**

##### **A. Installation**

- If there is a gap present in the corners that is allowing light in, it may be blocked using the light-blocking foam tape.



- Remove the device from the hood.

#### **V. CUTTING A NOTCH IN THE FLAP:**

Your device may require a notch to be cut out to gain access to a port or accessory. This may be done using scissors or an Exacto blade.



##### **A. Measure for the Notch**

- Using a tape measure or the actual accessory port, mark on the flap where the notch is required with a pencil.

##### **B. Cutting**

- Using scissors or an Exacto blade, cut the notch towards the seam of the flap, then cut along the seam to complete the cut out.

Your installation should now be complete.

The Indoor / Outdoor Monitor Hood may be cleaned with a mild detergent.

We would enjoy your feedback – please contact us via [sales@photodon.com](mailto:sales@photodon.com), or visit <https://www.Photodon.com> for all your viewing needs.

This hood is made to your specifications. If the hood does not fit, please contact Photodon customer service at 847-377-1185, M-F, EST, or email us at [sales@photodon.com](mailto:sales@photodon.com).

*Photodon also offers a variety of high quality screen care products to improve your screen viewing experience.*

*Screen Protectors  
Privacy Filters  
Monitor Hoods  
Screen Cleaning Products  
Promotional Microfiber Cloths  
Business to Business Services*

*We welcome your questions and suggestions about our products.*

*Find us at: [www.photodon.com](http://www.photodon.com)*

*[sales@photodon.com](mailto:sales@photodon.com)  
847-377-1185  
Monday-Friday 9am-5pm EST*