

Privacy Filter (P2L) Install Instructions



Supplies included:

2 - Microfiber cloths

1 - 1oz. Bottle of anti-scratch cleaner


1 - Pair of non-latex gloves

Double-sided adhesive strips

Instructions:


Verify:

1. Hold the filter up to your monitor to verify that you received the proper size filter.

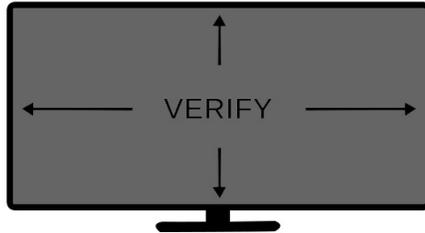


Clean:

2. With your monitor turned off, use the cleaner and large microfiber cloth provided to wipe down the device screen to prepare the screen for filter installation.

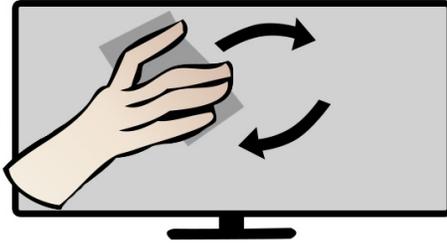

- Apply the adhesive strip(s) to the **glossy** side of the filter along the edges of the filter at the desired locations. (See recommended locations.)

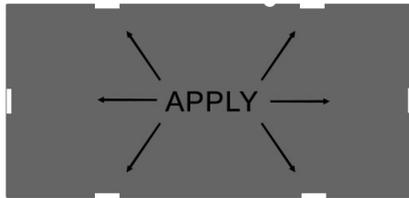


- After applying the strips, run your finger across the liner with slight pressure to remove any bubbles that may be present in the adhesive strips.

- Pull the paper liner exposing the medium-tack reusable adhesive on all the applied strips. Be careful to only remove the paper and not whole strip.



- Rest the filter on the bottom bezel, align the filter left and right. Tip the filter towards the device screen gently pressing at the adhesive attachment points to allow the adhesive tabs to hold the filter in place.

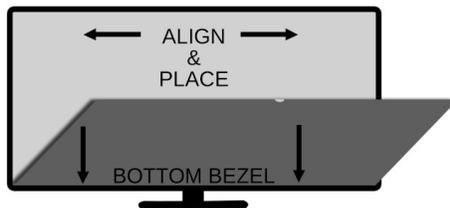


Put on gloves:

3. Wear the included set of gloves when handling the filter once the liners are removed to prevent fingerprints.



Remove filter liners:


4. Carefully remove both front and back liners from the filter. The back side is glossy, and the front is matte.

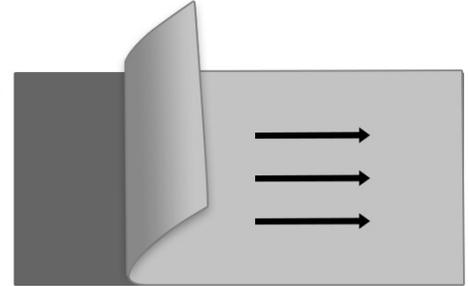

Note: The Privacy Filter is to be installed matte side out.

Release adhesive strips:

5. The enclosed double-sided adhesive strips are to hold the filter in place. Remove an adhesive strip from the paper backed liner card exposing the **hi-tack** adhesive.



- Run your finger across the filter where strips are located with slight pressure to remove any bubbles that may be present in the adhesive.



- If an adjustment is needed, the entire filter can be removed and realigned.

After Install:

6. Wipe down the front of the filter with the provided microfiber cloth and cleaner.

7. Power on the device.

- This filter will slightly darken the screen, consider adjusting the brightness of the screen if this is an issue.
- If you find that your image is blurry, verify that the filter is tight to the screen, additional strips may be necessary to accomplish this.

If additional or replacement installation supplies are needed, contact us at sales@photodon.com or at 847-377-1185